

The Military CYPRES Quick Guide For Operators

The military CYPRES is available in the following standard models:
All models can be adapted with a one or two-pin cutter.

1000/35 A



1000/35 indicates that this unit is set to activate at approximately 1000 ft above the DZ if the vertical speed is faster than approximately 35 meters / second (~ 78 mph)

1500/35 A



1500/35 indicates that this unit is set to activate at approximately 1500 ft above the DZ if the vertical speed is faster than approximately 35 meters / second (~ 78 mph)

1900/35 A



1900/35 indicates that this unit is set to activate at approximately 1900 ft above the DZ if the vertical speed is faster than approximately 35 meters / second (~ 78 mph)

2500/35 A



2500/35 indicates that this unit is set to activate at approximately 2500 ft above the DZ if the vertical speed is faster than approximately 35 meters / second (~ 78 mph)

The **A** indicates that all CYPRES work with absolute pressure

For further information's or questions please contact
military@cypres.cc



This Quick Guide does not replace the CYPRES 2 User's Guide nor releases the user from the obligation to comply with the contents of the CYPRES 2 User's Guide.

The Military CYPRES Quick Guide For Operators

The military CYPRES is available in the following standard models:
All models can be adapted with a one or two-pin cutter.

2500/29 A



2500/29 indicates that this unit is set to activate at approximately 2500 ft above the DZ if the vertical speed is faster than approximately 29 meters / second (~ 65 mph)

Changeable MODE



Activation altitude according to each Mode

active BDZ (Below DropZone)
Activation altitude down to MSL



Available for all military models but on request only
This feature increases the chance of unwanted activation's inside the airplane

The **A** indicates that all CYPRES work with absolute pressure

For further information's or questions please contact
military@cypres.cc



This Quick Guide does not replace the CYPRES 2 User's Guide nor releases the user from the obligation to comply with the contents of the CYPRES 2 User's Guide.

2 Application Modes

Training Mode

The feature of the civilian CYPRES properties were adapted to the various military models. The activation altitude and speed criteria are based on the military model. (see reference data in the user's guide). While on the ground it takes care of all meteorologic pressure changes during the next 14 hours.

Useful if you are doing training jumps, when Take OFF and landing (Target DZ) will be at the **same** location / elevation. Flight counter available on Training Mode flights only.



Operation Mode

The unit can be set to every DZ on this globe, whether it is the Dead Sea or the Himalaya or even to a higher virtual DZ e.g. HAHO jump.

It is possible to do the programming prior to Take-OFF, during flight and even inside an active pressurized cabin.

Just enter the absolute air pressure value (hPa) of your Target DZ into the control unit display.

No flight counter available in Operation Mode.



This Quick Guide does not replace the CYPRES 2 User's Guide nor releases the user from the obligation to comply with the contents of the CYPRES 2 User's Guide.

Quick Guide - General Guidance -

Explanation of the symbols / icons in this Quick Guide




click the button (a short press and release)



hold the button (keep the button pressed)



release the button

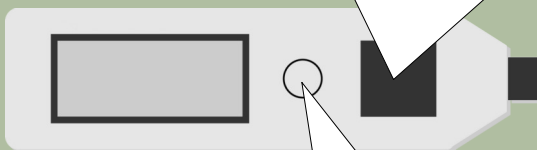

LED flash



LED ON



LED OFF



next indication / action



indication sequence ends with



continues from „10“ to „0“


e.g. calculation examples in blue



This Quick Guide does not replace the CYPRES 2 User's Guide nor releases the user from the obligation to comply with the contents of the CYPRES 2 User's Guide.

How to use the
quick guide

Switch ON Training Mode



SWITCH OFF
same procedure



10

self test calibration 10 → 0

9

8



0910

ambient air-pressure at
actual / current location

0'

self test OK
unit switched ON

Switch ON



*** IMPORTANT:** watch the complete „count down“ until you see 0'




****** Additional information possible between “1” and “0'”
(displayed on page 15 + 16)



This Quick Guide does not replace the CYPRES 2 User's Guide nor releases the user from the obligation to comply with the contents of the CYPRES 2 User's Guide.

Unit Information

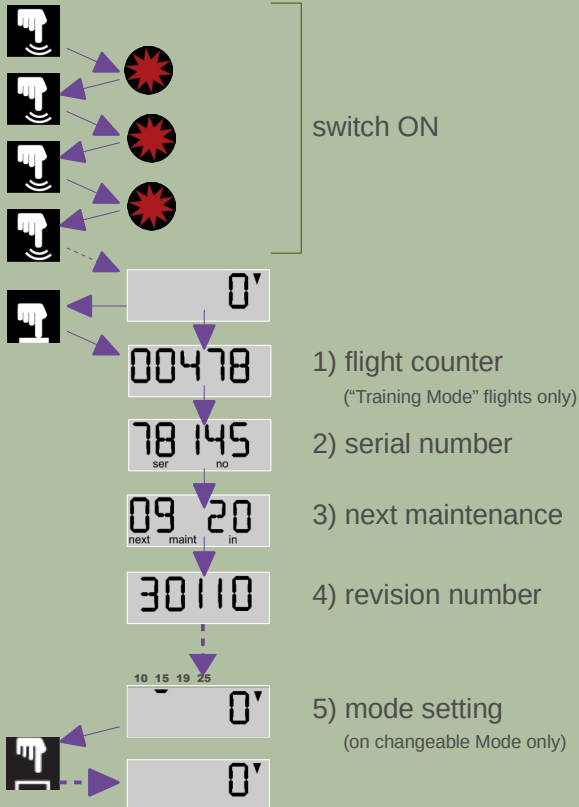


Unit Information



This Quick Guide does not replace the CYPRES 2 User's Guide nor releases the user from the obligation to comply with the contents of the CYPRES 2 User's Guide.


Changing the Mode 1000 / 1500 / 1900 / 2500

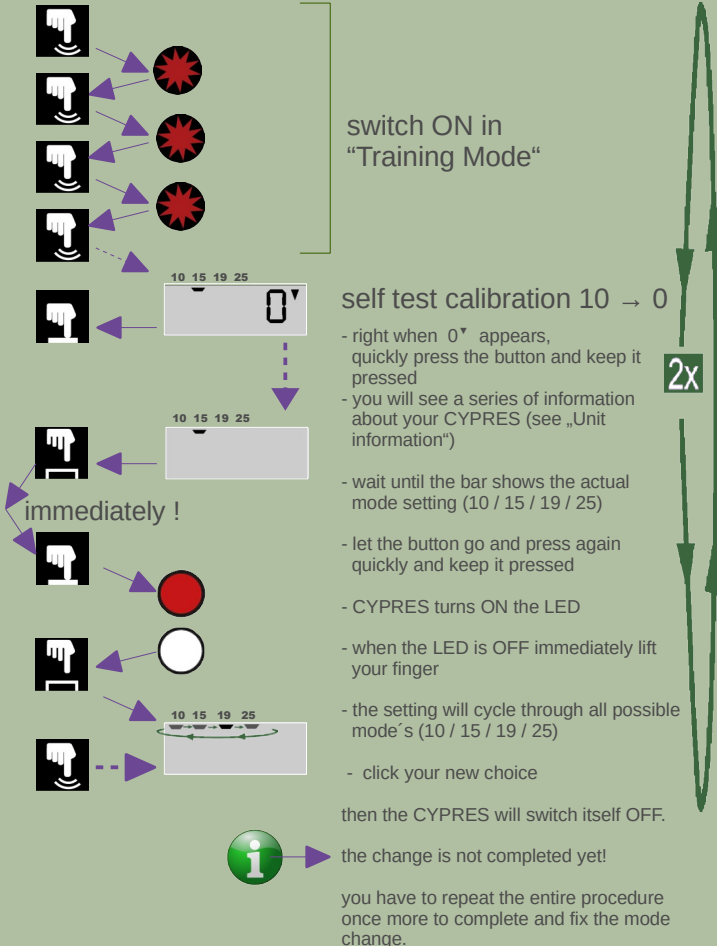

This Quick Guide does not replace the CYPRES 2 User's Guide nor releases the user from the obligation to comply with the contents of the CYPRES 2 User's Guide.

Switch ON Operation Mode

“Entering hPa of Target DZ“ (Example 893 hPa)

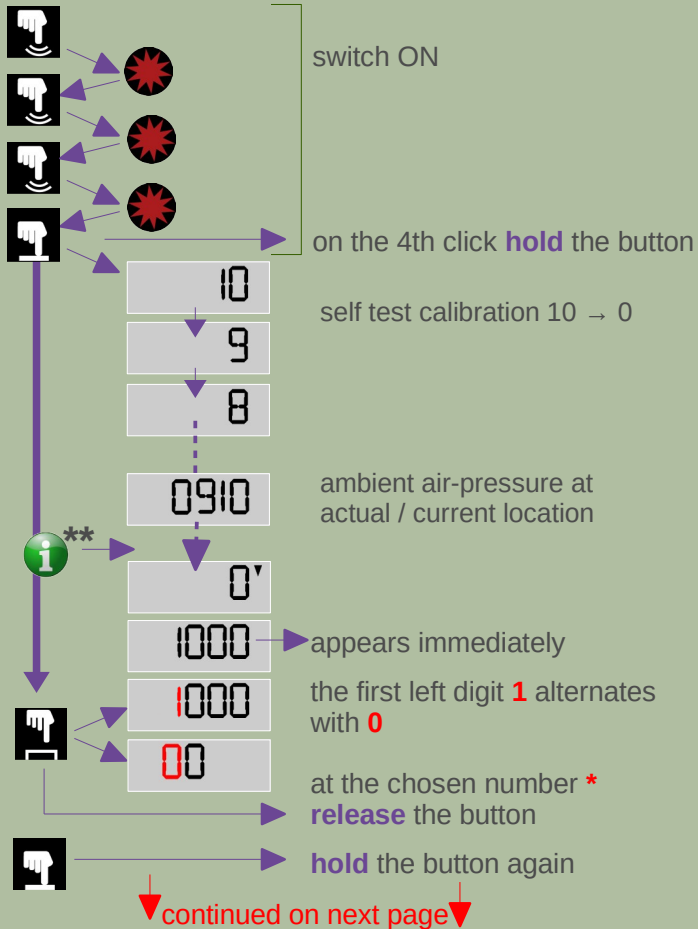

Additional information possible between “1” and “0” (displayed on the last 2 pages)



This Quick Guide does not replace the CYPRES 2 User's Guide nor releases the user from the obligation to comply with the contents of the CYPRES 2 User's Guide.

Switch ON Operation Mode

“Entering hPa of Target DZ“ (Example 893 hPa)

↓ continued from previous page ↓



00

the second digit counts 0-9

08

at the chosen number *
release the button



hold the button again



080

the third digit counts 0 - 9

089

at the chosen number *
release the button



hold the button again



0890

the fourth digit counts 0 - 9

0893

at the chosen number *
release the button

0893

unit switched ON
set hPa will stay visible



x 4 seconds *** confirmation of setting



*** during this 4 seconds it is possible
to restart setting procedure by
holding the button



* if you missed the correct number, just
keep holding the button
until the number appears again.



This Quick Guide does not replace the CYPRES 2 User's Guide nor releases the user from the obligation to comply with the contents of the CYPRES 2 User's Guide.

Operation Mode Using The Military Calculator



If absolute air-pressure (hPa) of Target DZ is not available



METHOD 1 --> if:


- Target DZ and Take Off area are local but at different elevations
- Take Off elevation is available
- Target DZ elevation is available



- switch ON
- enter **ambient** ground pressure (QFE) (switch ON hPa value)
e.g.
- press hPa
- press + (if target is higher)
press - (if target is lower)
- enter **difference** in feet (meters) between Take OFF location and Target DZ. e.g.
- press „feet“ (meters)

display shows hPa of Target DZ

enter value into the Military CYPRES



This Quick Guide does not replace the CYPRES 2 User's Guide nor releases the user from the obligation to comply with the contents of the CYPRES 2 User's Guide.

Operation Mode Using The Military Calculator



If absolute air-pressure (hPa) of Target DZ is not available



METHOD 2 --> if:

- Target DZ and Take Off area are at **different** locations
- elevation of Target DZ is available

Military
Calculator



← switch ON

← enter number (feet / meter) of altitude of Target DZ above MSL
e.g. **1470**

(if below sea-level enter number and add "-")

← press **feet** (meter)

← press **hPa**

display shows hPa of Target DZ

(only an estimation as this pressure value does not accommodate local weather variations)

enter value into the Military CYPRES



This Quick Guide does not replace the CYPRES 2 User's Guide nor releases the user from the obligation to comply with the contents of the CYPRES 2 User's Guide.

Operation Mode Using The Military Calculator



If absolute air-pressure (hPa) of Target DZ is not available



METHOD 3 --> if:

- Target DZ and Take Off area are at **different** locations
- Target DZ pressure at Mean-Sea-Level (QNH / Altimeter setting) is available



← switch ON

← enter number hPa of Target DZ at MSL (QNH / altimeter setting)
e.g. **1022**

← press hPa

← press "+" or "-"

← enter elevation of Target DZ above/below MSL
e.g. **3555**

← press feet / meter



Military Calculator

display shows hPa of Target DZ

enter value into the Military CYPRES →



This Quick Guide does not replace the CYPRES 2 User's Guide nor releases the user from the obligation to comply with the contents of the CYPRES 2 User's Guide.

Important Notes For Airplane Pilots !

If you use the Military CYPRES in Training Mode (also see next page)

- Every Military CYPRES has to **exceed** an altitude of more than 1500 ft above activation altitude to become fully armed.
- **Never** descend to an altitude **below** the Take OFF elevation
- If the aircraft can be pressurized, make sure that the cabin remains open when the turbines are started up. Leave a window, a door open slightly until after lift-off. Make sure that the cabin pressure cannot build up above the air pressure on the ground.
(! the altimeter should never go below „0“)

Always: If you use the Military CYPRES in Operation Mode and Training Mode

- Stay below the vertical activation speed inside the activation window; 6900 ft/min (35 m/s) or 5700 ft/min (29 m/s) if you are descending with the aircraft. Can also be simulated by changing the cabin air pressure.




This Quick Guide does not replace the CYPRES 2 User's Guide nor releases the user from the obligation to comply with the contents of the CYPRES 2 User's Guide.

Important Notes For Users !

- To make sure that a Military CYPRES device is armed when it is used in **Training Mode**, you must fly at least 1500ft above the preset firing altitude. The Military CYPRES device is always armed when in **Operational Mode**.
- A two canopy scenario can occur, if the main deploys too low and the opening reaches into the activation window.
- In case of **Training mode** only: After take-off please ascend at more than 180 feet per minute (1 meter / second) for at least 30 seconds.

The drawing below shows what must be adhered to when using the Military CYPRES in **Training Mode!**

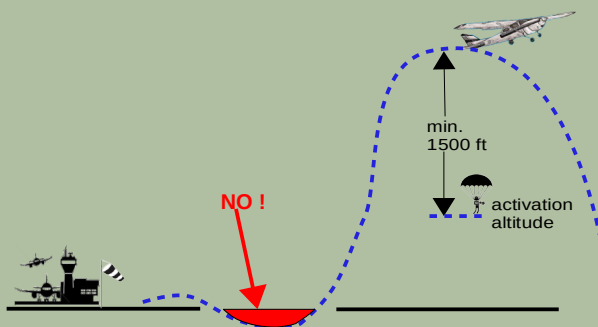

If the Military CYPRES is used in **Operation Mode**, the above mentioned limitations do not apply.

- The CYPRES 2 is waterproof (in fresh and salt water) for - 15 ft for up to 15 minutes; - 8 ft for up to 24 hours
- After contact with water, CYPRES must be switched OFF after exiting the water. - replace filter before next use
- After an activation, the cutter can be replaced by any rigger / packer. After the change, perform a self test and the unit can be used again immediately.
- After 14 hours have passed, every CYPRES unit will switch off automatically. No matter of the actual location.



This Quick Guide does not replace the CYPRES 2 User's Guide nor releases the user from the obligation to comply with the contents of the CYPRES 2 User's Guide.

Information On Control Unit Display

These notes will eventually appear during the self test procedure between 1 and 0

These messages are not ERROR codes. Only helpful information's.
The service window frame is 13 months.

Example: date of manufacture **03/2017**, the first maintenance is possible 09/2021 until 09/2022

The second maintenance is possible 09/2026 until 09/2027

starting 6 months prior to maintenance date (09/2021)
beginning of service time window

displayed for 2 seconds




starting at maintenance due date

displayed for 3 seconds




maintenance date over due 3 months

displayed for 5 seconds




maintenance over due 6 months (now)
end of service time window (09/2022)

displayed for 5 seconds



starting 15,5 years after date of manufacture (age)
end of service life time. Can start appearing within the last month.

displayed for 5 seconds



This Quick Guide does not replace the CYPRES 2 User's Guide nor releases the user from the obligation to comply with the contents of the CYPRES 2 User's Guide.

Display Information's


Error Codes On Control Unit Display

If there is an error detected during the self test then it shows this code for about 2 seconds before it switches itself OFF.

One or both cutters are not electronically connected to the unit.


Reasons: activated cutter, damaged cable, plug not completely connected.

Action: replace or reconnect cutter. Switch ON procedure can be repeated. If self test is OK CYPRES can be used again




Excessive pressure variations during self test.
Possible reason: moving vehicle or moving aircraft.

Action: Switch ON procedure can be repeated. If self test is OK CYPRES can be used again



Low battery condition.

Action: contact Airtec / SSK before further use




Power Down

Action: contact Airtec / SSK before further use




Checksum Error

Action: contact Airtec / SSK before further use



Pressure Sensor Error

Action: contact Airtec / SSK before further use



If unit does not switch OFF after 14 h, or another code is shown on display, or if there is no red light, do not use the CYPRES and contact Airtec military@cypres.cc or SSK info@sskinc.com before further use



This Quick Guide does not replace the CYPRES 2 User's Guide nor releases the user from the obligation to comply with the contents of the CYPRES 2 User's Guide.